



Single Solderless Earth Connection

For 3 core paper lead cable.

| Part Number | Cable Size (mm ²) | | |
|-------------|-------------------------------|-----------|----------|
| | 6.6kV | 11kV | 33kV |
| EAKT 1669 | 16 - 120 | 16 - 95 | - |
| EAKT 1670 | 150 - 240 | 120 - 185 | - |
| EAKT 1671 | 300 - 400 | 240 - 300 | 50 |
| EAKT 1672 | - | 400 | 70 - 300 |



Single Solderless Earth Connection

For 3 core corrugated aluminium sheathed cable.

| Part Number | Cable Size (mm ²) |
|-------------|-------------------------------|
| SMOE 61203 | 95 - 300 |

Heat Shrink Insulating Boots

Set of 3 for up to 17.5kV.

For use in switchgear and transformers where there is insufficient clearance for operation in air or to protect against flash over due to rodents or extreme humidity.

| Cable Range | Straight Boots | Right Angle Boots |
|--------------------------|----------------|-------------------|
| | Part Number | Part Number |
| 10 - 35mm ² | RSRB 4022 | RSRB 4042 |
| 50 - 95mm ² | RSRB 4024 | RSRB 4044 |
| 120 - 300mm ² | RSRB 4026 | RSRB 4046 |




Cold Applied Inline or Right Angle 'Flexy' Boots

Set of 3 for up to 17.5kV.

The boot can be removed or reinstalled without the need for additional material, allowing access to the bushing connection for test purposes.

Bushing diameter 31mm to 70mm (bushings less than 45mm use collar).

| Conductor Range | Part Number |
|-------------------------|-------------|
| 35 - 400mm ² | SMOE62804 |

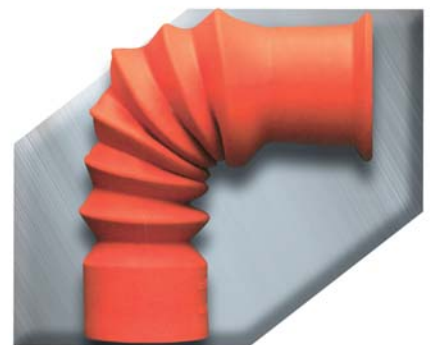

Also available RCAB5120 for 630Amp straight bushing 24kV.