



Multiway Service & Rising Main Distribution Boards

MSDB7 and MSDB10

Manufactured in glass reinforced polyester and fitted with either 7 or 10 Lucy EA12-10 / BS7657 cut outs (maximum rating 100amp). Incoming cable maximum 185mm² / 35mm² maximum outgoing.



MSDB24, MSDB30 & MSDB36

Manufactured in 2mm galvatite steel - epoxy painted. Fitted with either 24, 30 or 36 Lucy EA12-10 / BS7657 cut outs (maximum rating 100amp). Incoming cable maximum 185mm² / 35mm² maximum outgoing.




MSDB16

Manufactured in 2mm galvatite steel - epoxy painted. Fitted with 16 Lucy EA12-10 / BS7657 cut outs (maximum rating 100amp). Incoming cable maximum 185mm² / 35mm² maximum outgoing.



55220 Series Multiway Service Heads

Manufactured from 1.6mm zinc coated steel and fitted with either 7, 10, 16 or 24 Henly Series 7 cut outs (maximum rating 100amp), 35mm² maximum outgoing cable size, suggested maximum incoming cable sizes 7/10way-120mm², 16way-185mm², 24way-300mm².

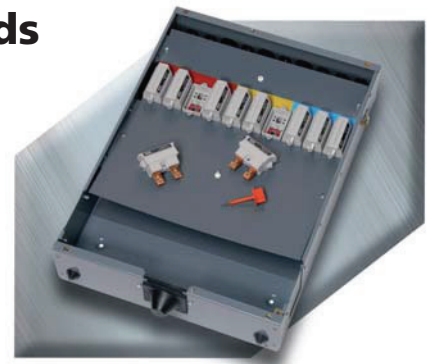

Ref Code	Description	Dimensions (mm)
55221-37	7way 60/80amp	634 (L) x 390 (W) x 135 (D)
55221-63	7way 100amp	634 (L) x 390 (W) x 135 (D)
55222-30	10way 60/80amp	684 (L) x 528 (W) x 135 (D)
55222-69	10way 100amp	684 (L) x 528 (W) x 135 (D)
55223-20	16way 60/80amp	684 (L) x 804 (W) x 135 (D)
55223-53	16way 100amp	684 (L) x 804 (W) x 135 (D)
55224-02	24way 100amp	711 (L) x 1125 (W) x 121 (D)
55201-20	24way 60/80amp	711 (L) x 1125 (W) x 121 (D)