



Fuse Units

MC040SLF Single Phase Fuse Unit

Designed, tested and manufactured in accordance with BS7654.1997. Two versions, separate neutral and earth (SNE), and combined neutral/earth (CNE) for PME applications. Re-designed cam action ensures low extraction force. Operating cam lever ensures electrical disconnection prior to removal of fuse carrier for extra safety.


- Max rating 25amp.
- Accepts tag type LST fuses.
- Maximum copper cable 16mm².



MC040DN Compact Double Pole Unit

The compact double pole MC040DN fuse unit has been designed for installation in confined spaces.

- Max rating 25amp.
- Accepts fuse links with offset tags.
- Height 70mm / Width 57mm / Depth 53mm.

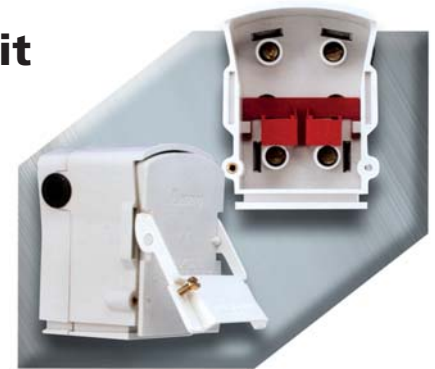

Fuse Carrier

Replacement fuse carriers for Lucy SLE, SLF, DN and Titan Cut Outs are available.

HRC Fuses

A complete range of HRC Fuses to suit the cut-outs described here are available.

