

MXAW / SXAW

Raychem Medium Voltage Heat Shrink Cable Joints for Aluminium Wire Armoured Cables up to 36 kV

FEATURES

- Pre-engineered range taking heat-shrinkable tubings incorporating precisely engineered impedance stress control. MXAW joints are supplied complete with mechanical phase and screen connectors
- SXAW are supplied without connectors
- Suitable for a wide range of conductor sizes with no limitations on shelf life


APPLICATION

- Suitable for polymeric Aluminium Wire Armoured (AWA) cables

CONFORMS TO

- CENELEC and IEC standards

Raychem medium voltage heat shrink cable joints for aluminium wire armoured cables up to 36 kV

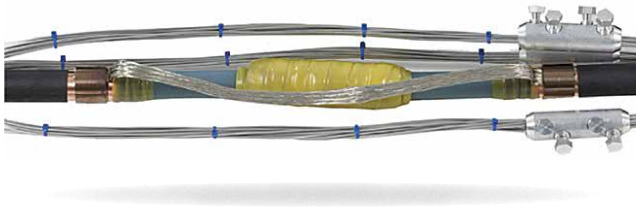

Product name	Conductor size (mm ²)	Part number
12 kV		
SXAW-3121	95 – 185	233081-011
SXAW-3131	185 – 300	174325-011
SXAW-3141	400 – 500	755643-011
SXAW-3151	630 – 800	707034-000
17.5 kV		
SXAW-3121	70 – 120	233081-011
SXAW-3131	150 – 240	174325-011
SXAW-3141	300 – 400	755643-011
SXAW-3151	500 – 630	707034-000
24 kV		
SXAW-5121	50 – 95	CA5973-011
SXAW-5131	120 – 185	304733-011
SXAW-5141	185 – 400	020745-011
SXAW-5151	500 – 630	564361-011
24 kV		
MXAW-5131	95 – 185	CN6571-011
MXAW-5132	150 – 300	CN6573-011
MXAW-5141	240 – 400	CB2695-011
MXAW-5151	500	CN6574-011
MXAW-5161	630	CN6572-011
36 kV		
SXAW-6122	50 – 95	CA5972-011
SXAW-6132	120 – 240	151361-011
SXAW-6142	300 – 630	814905-011
MXAW-6131	150 – 300	CV2754-011