

House Service Cut Outs

Single Pole: 60 / 80A rated, 100A rated

Overview and Presentation

Devices accepting BS 1361 cylindrical cartridge fuses generally fitted at the origin of the installation.



Features

- Two incoming and outgoing Phase terminations which accept up to 35mm² conductors in either copper or aluminium, stranded or solid
- Silver plated Phase terminal contact block
- Serrated bores on Phase terminal contact blocks with two M8 hexagon drive pinching screws per conductor
- Sealing wire facility
- Blanking plugs for unused cable entries provided
- Accessories available include cable cover, cable chamber and busbar extensions

Note: The equipment described on this data sheet must be installed by suitably qualified personnel according to applicable Local / National Wiring regulations currently in force.

Low Voltage - Cut Outs

Construction

- Body, base and cover..... Glass reinforced polyester DMC in RAL 7035 colour
- Terminal blocks..... Silver plated brass

Product characteristics

- 60/80A 57 x 22mm Type IIa BS 1361
- 100A 57 x 30mm Type IIb BS 1361

Note: Different combinations of fuse cut outs can be ganged to create a range of Triple pole variants

Performance

- Rated voltage..... 240/415V a.c.
- Max rated current..... 100A
- Supply frequency..... 50-60Hz
- Flammability rating .. UL VO, self-extinguishing 30 seconds at 960 degrees C
- Recommended terminal torque..... 3.25Nm
- Fuse short circuit rating..... 33kA at 0.3pf


Conformity to Standards

- Conforms to BS 7657: 2010
- Accepts fuse links in accordance with BS 1361:1991

Weights and dimensions

- Height 98mm
- Width 43mm
- Depth 96mm
- Weight (excluding fuse)..... 0.43kgs

General arrangement and dimensions (mm)

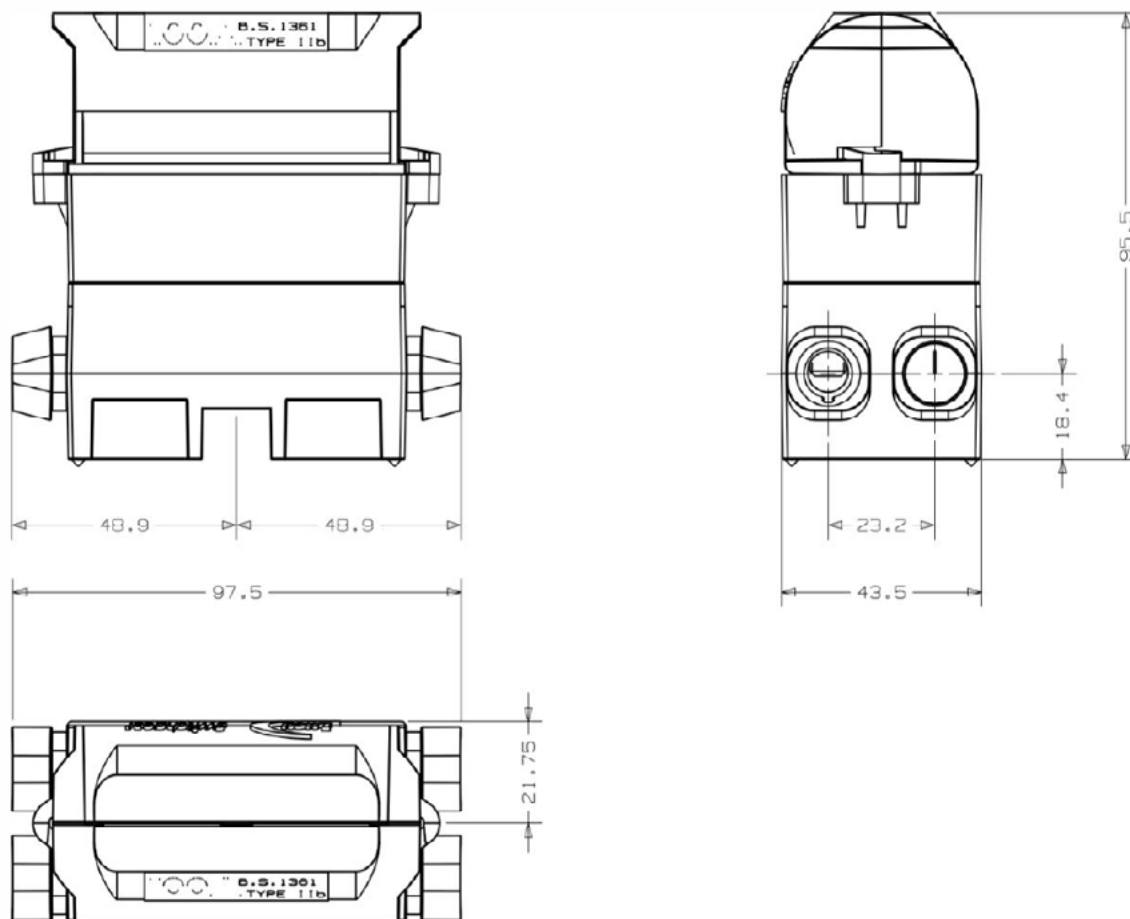

Disclaimer: Lucy Electric has a policy of continuous research and development thus accordingly reserves the right to change the design and specifications of its products without prior notice or liability.



www.lucyelectric.com