

SINGLE CABLE CLEATS

POLYMERIC FLAME-RETARDANT VO MATERIAL

STRONG PERFORMANCE WITH MAXIMUM CABLE PROTECTION

KEY FEATURES

- Made from impact-resistant, UV-stabilized, polymeric flame-retardant VO material for use in harsh environments
- High resistance to electromechanical forces
- Strong mechanical performance from innovative rib design and glass fiber reinforced material
- Easy and fast installation thanks to simplified design
- Flat surface design allows stacked configuration without adapter
- Interlocking EPDM molded inserts version for increased asset protection
- Available with stainless-steel hardware for higher corrosion resistance and mechanical performance

TE Connectivity's (TE) Single Cable Cleats are designed to offer a highly reliable retention system for cables and terminations in LV, MV and HV applications. They are compact, stackable and reduce the mechanical load where space is limited, such as wind farms, data centers, substations and switchgears.

The single cable cleats are engineered to withstand harsh environments. Made from impact-resistant, UV-stabilized, polymeric flame-retardant VO material that is UL certified, they perform under extreme temperatures from -40°C to +120°C (-40°F to +248°F).


Tested according to IEC 61914, the cable cleats provide high resistance to electromechanical forces during short circuit conditions, without causing damage to the cables. They also ensure an excellent mechanical performance due to their innovative rib design and glass fiber reinforced material.

An easy and fast installation is achieved thanks to the cable cleats simplified design without any need for reinforcing accessories. The flat surface of the cable cleat allows different stacked configurations without special hardware or height adapters. Our cable cleats are range-taking to fit cables with an outer diameter up to 135 mm (5.31 inches), and are suitable for both metric and imperial sized molded inserts and with hardware.

The interlocking EPDM molded inserts accommodate cable expansion, contraction, and vibration, as well as offering an increased level of asset protection. The stainless-steel hardware offers higher corrosion resistance and mechanical performance. To serve a wider application range, our cable cleats are also available as dual and trefoil versions.

Customers can count on consistent, high quality products, driven by TE's proven innovation and backed by our extraordinary customer support.

Single Cable Cleats

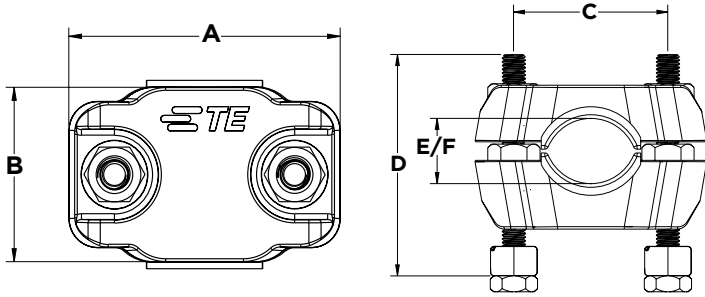


PRODUCT SELECTION INFORMATION - DIMENSIONS IN MM AND (INCHES)

| Description | Available Mounting Option | Length A | Depth B | Bolt Hole Center C | Max Installed Height D | Min Cable E | Max Cable F |
|---------------|---------------------------|------------|-----------|--------------------|------------------------|-------------|-------------|
| CC15-26-INS | Cable Cleat with Inserts | 96 (3.78) | 60 (2.36) | 64 (2.52) | 90 (3.54) | 15 (0.59) | 26 (1.02) |
| CC15-26-SN | Strut Nut | | | | | | |
| CC15-26-FM | Flat Mount | | | | | | |
| CC15-26-CM | Center Mount | | | | | | |
| CC26-38 | Cable Cleat Only | 96 (3.78) | 60 (2.36) | 64 (2.52) | - | 27 (1.06) | 42 (1.65) |
| CC26-38-INS | Cable Cleat with Inserts | 96 (3.78) | 60 (2.36) | 64 (2.52) | 90 (3.54) | 26 (1.02) | 38 (1.5) |
| CC26-38-SN | Strut Nut | | | | | | |
| CC26-38-FM | Flat Mount | | | | | | |
| CC26-38-CM | Center Mount | | | | | | |
| CC38-50 | Cable Cleat Only | 114 (4.49) | 60 (2.36) | 80 (3.15) | - | 39 (1.53) | 54 (2.12) |
| CC38-50-INS | Cable Cleat with Inserts | 114 (4.49) | 60 (2.36) | 80 (3.15) | 100 (3.94) | 38 (1.5) | 50 (1.97) |
| CC38-50-SN | Strut Nut | | | | | | |
| CC38-50-FM | Flat Mount | | | | | | |
| CC38-50-CM | Center Mount | | | | | | |
| CC50-75 | Cable Cleat Only | 136 (5.35) | 65 (2.56) | 100 (3.93) | - | 51 (2.00) | 79 (3.11) |
| CC50-75-INS | Cable Cleat with Inserts | 136 (5.35) | 65 (2.56) | 100 (3.93) | 130 (5.12) | 50 (1.97) | 75 (2.95) |
| CC50-75-SN | Strut Nut | | | | | | |
| CC50-75-FM | Flat Mount | | | | | | |
| CC50-75-CM | Center Mount | | | | | | |
| CC75-100 | Cable Cleat Only | 164 (6.45) | 70 (2.76) | 126 (4.96) | - | 76 (2.99) | 104 (4.09) |
| CC75-100-INS | Cable Cleat with Inserts | 164 (6.45) | 70 (2.76) | 126 (4.96) | 150 (5.91) | 75 (2.95) | 100 (3.93) |
| CC75-100-SN | Strut Nut | | | | | | |
| CC75-100-FM | Flat Mount | | | | | | |
| CC75-100-CM | Center Mount | | | | | | |
| CC100-135 | Cable Cleat Only | 200 (7.87) | 80 (3.15) | 160 (6.30) | - | 101 (3.97) | 139 (5.47) |
| CC100-135-INS | Cable Cleat with Inserts | 200 (7.87) | 80 (3.15) | 160 (6.30) | 170 (6.69) | 100 (3.93) | 135 (5.31) |
| CC100-135-SN | Strut Nut | | | | | | |
| CC100-135-FM | Flat Mount | | | | | | |
| CC100-135-CM | Center Mount | | | | | | |



FLAT MOUNT VERSION

Used when installing on a mounting plate.

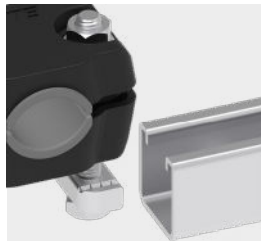

STRUT NUT VERSION

Used where access to the end of the mounting rail is not possible.



CENTER MOUNT VERSION

Used where fixing the cleat through the center is needed (center bolt not included).



CABLE CLEAT ONLY

Can be upgraded to any mounting variant.



CABLE CLEAT WITH INSERT

For extra grip and cable protection.

Single Cable Cleats



DESIGN DATA

| | |
|-----------------------------|---|
| Material Type | Polymeric, 30 % glass fiber reinforced Nylon |
| Material Color | Black |
| Material Properties | Zero halogen, red phosphorous free, UL94 V0 self-extinguishing |
| Design Specification | IEC 61914:2021 |
| Operating Temperature Range | -40°C to +120°C (-40°F to +248°F) |
| Resistance to Impact | Very heavy (classification according to IEC 61914:2021 Table 5) |
| Short Circuit Test | Third-party lab certified in accordance with IEC 61914:2021 subclause 9.5 |
| Additional Cable Protection | EPDM inserts available for all sizes |

TECHNICAL SPECIFICATION

| Test Requirement | Test Data | Reference |
|------------------------------------|-----------------------|-------------------------------|
| Impact Resistance | 5 kg (20 J) | IEC 61914:2021 subclause 9.2 |
| Lateral Load Test | Perpendicular Pull | IEC 61914:2021 subclause 9.3 |
| | Parallel Pull | |
| Axial Load Test | 1.6 kN max. | IEC 61914:2021 subclause 9.4 |
| Resistance to Electrodynamc Forces | Up to 219 kA @ 900 mm | IEC 61914:2021 subclause 9.5 |
| UV Resistance | Xenon-arc | IEC 61914:2021 subclause 11.1 |
| | UVB 313 cycle 3 | ASTM G154 |
| Needle Flame Test | 120 s | IEC 61914:2021 subclause 10.1 |
| Glow Wire Test (960° GWT) | 30 s | IEC 60695-2 |

Learn more: [TE.com/energy](https://www.te-connectivity.com/energy)

© 2022 TE Connectivity. All Rights Reserved. CA-DDS-3708-SINGLECLEATS-01/22-EN

TE, TE Connectivity, TE connectivity (logo), EVERY CONNECTION COUNTS are trademarks owned or licensed by TE Connectivity. Other logos, product and company names mentioned herein may be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions, specifications, and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications, and/or information. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

Connect with us:

[TE.com/energy-contact](https://www.te-connectivity.com/energy-contact)